

MUNSTER GPS TK905 INSTRUCTIONS



SECURITY - SURVEILLANCE - PEACE OF MIND

Open the rubber cover, insert the SIM card (gold chip side up) into the slot, the device auto starts.

The indicator light is on when the SIM card is inserted.

The device receives a GPS location when there is GPS signal available. If there is no GPS signal available it gets a LBS location.

The device automatically turns off when the SIM card is removed.

SMS TRACKING

4.1. Call the SIM card phone number in the tracker, you will receive a text reply with a Google Maps link position, or send a text "G123456#" to the SIM card phone number in the tracker and you will receive the same.



When you click on the link above it will take you to google maps and shows you the position of the tracker.


4.2. Admin number setting

Send text: **admin123456 phone number** (This phone number is your own mobile phone number, not the SIM card number in tracker .)

eg. **admin123456 13265790180**

replace 13265790180 with your own number

Reply will be sent to your phone: **admin ok**

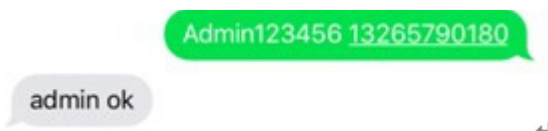

When the unit is in over-speed alarm, shake sensor alarm, or low battery alarm, it will send an alert to the admin number.(13265790180)

Cancel Admin number:

Send text: **noadmin123456**


Reply will be sent to you phone: **noadmin ok**

4.3. Over-speed Alarm setting(It works only in continuous positioning mode.)

Over-speed Alarm setting:

Send text: **speed123456 070** (Setting max speed at 70km/h)

Reply will be sent to you phone: **speed ok**

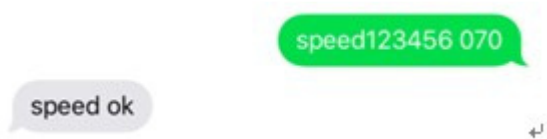

When the unit speed is over 70km/h, it will send message “speed alarm!” to the admin number every 5 minutes.

Over-speed Alarm cancelling

Send text: **nospeed123456**

Reply **nospeed ok**

4.4. Shake Alarm setting

Send text: **shock123456**

Reply will be sent to you phone: **shock ok**

Note: For the shake alarm setup the tracker must be kept stationary for 5 minutes before sending the command.

The tracker will send SMS “**sensor alarm!**” to the admin number when the unit is shocked (moved slightly).

Shake alarm Cancelling:

Send text: **noshock123456**

Reply will be sent to you phone: **noshock ok**

4.5. Device working mode setting

Sleep by shock sensor mode setting: (Factory setting is “Sleep by shock mode“)

Send text: **sleep123456 shock**

Reply **sleep shock ok**

(No shock for 5 minutes, the tracker will work in “sleep by shock” mode, GPS shut off, GSM works in low consumption. Vibration, SMS or calling will wake up the tracker.)



4.7 Reset Hardware

Send text: **begin123456**

Reply will be sent to you phone: **begin ok**

ONLINE TRACKING

Please activate GPRS by sending command “gprs123456” when the tracker is on, and set APN by the following steps.

Two steps to set APN:

- 1) Turn on gprs function by sending command “gprs123456”
 - 2) Set APN by sending command “apn123456 isp.vodafone.ie”
- Replace isp.vodafone.ie with your providers APN

6.1 WEB ONLINE TRACKING

Platform : www.mytkstar.net

Select “Log in by IMEI” on the bottom of screen

IMEI No. : on the back side of cover

Password: 123456



TKSTAR GPS
li yi

